

# ROTAMATIC ST



2662-031

Easy-to use line of rotators covering a load carrying range from 2 tons up to 600 tons (Drive unit + Idler unit).

## Medium-duty rotator: 2 T to 30 T

Single powered (one drive roller) for small unbalance work piece.

Double powered (two drive rollers) for work pieces having significant unbalance.

Roller-to-roller center distance adjusting by screw (except for ST 2: by step).

■ Polyurethane roller for better drive

■ Symmetrical movement of roller axis distance for an easy adaptation of piece diameter


■ Idler rotator

■ Motorized rotator

■ Single or double motorization with mechanical protection

■ CE electrical cabinet

■ Remote pendant on all models

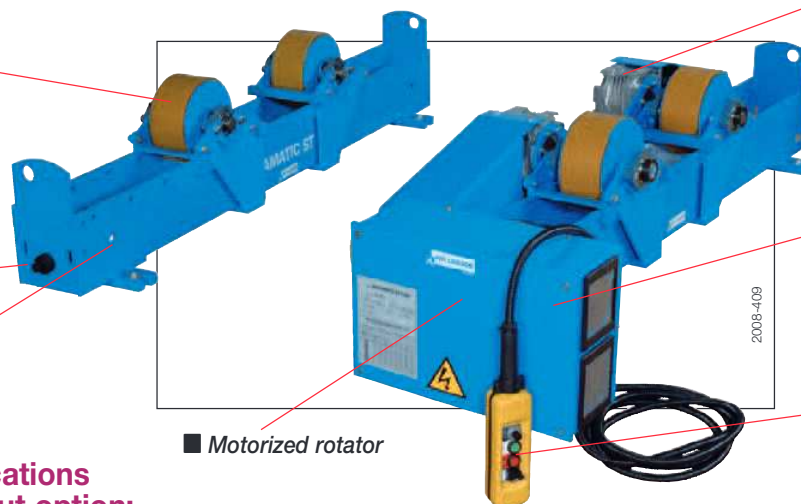

2008-009

## Technical specifications for rotators without option:

Designation	Cat. no.	Load capacity (1 drive + 1 idler) kg	Load capacity per section kg	Shell diameter mm	Peripheral speed cm/min	Wheel dimension OD x width	Wheel material	
ST 2	MT	W000315290	2000	1000	30 to 2500	12 to 120	Ø 150 x 50	Polyurethane
	M	W000315289						
	W	W000315288						
	F	W000315291						Polyamide
ST 6	M	W000315297	6000	3000	300 to 3500	12 to 120	Ø 250 x 75	Polyurethane
	W	W000315296						
	F	W000315298						
ST 15	M	W000315304	15000	7500	300 to 4000	12 to 120	Ø 250 x 110	Polyurethane
	W	W000315303						
	F	W000315305						
ST 30	W	W000315309	30000	15000	350 to 4500	12 to 120	Ø 350 x 150	Polyurethane
	F	W000315310						

### Keys:

M = Single motorization  
W = Double motorization

F = Idler roll  
MT = Single motorization with tube system